



MASTER PART MARK	VIN	AVAILABLE THICKNESS	YIELD MIN.	BLANK LENGTH	BLANK WIDTH	WEIGHT / FT (LBS)
CFR22-	A	22 GA	50 KSI	VARIABLES	30.19	3.26
CFR24-	A	24 GA	50 KSI	VARIABLES	30.19	2.46

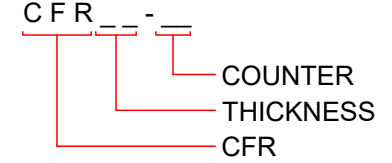

TOLERANCE STANDARDS

- * Accumulation ± 0.060
- Depth ± 0.031
- Radii ± 0.020
- Angles ± 2°
- Camber 0.125" in 10'
- Ski 0.125" in 10'
- Dive 0.125" in 10'
- * Net Variation for Combined Dimensions

NOTE:
RADII ARE R.05 UNO

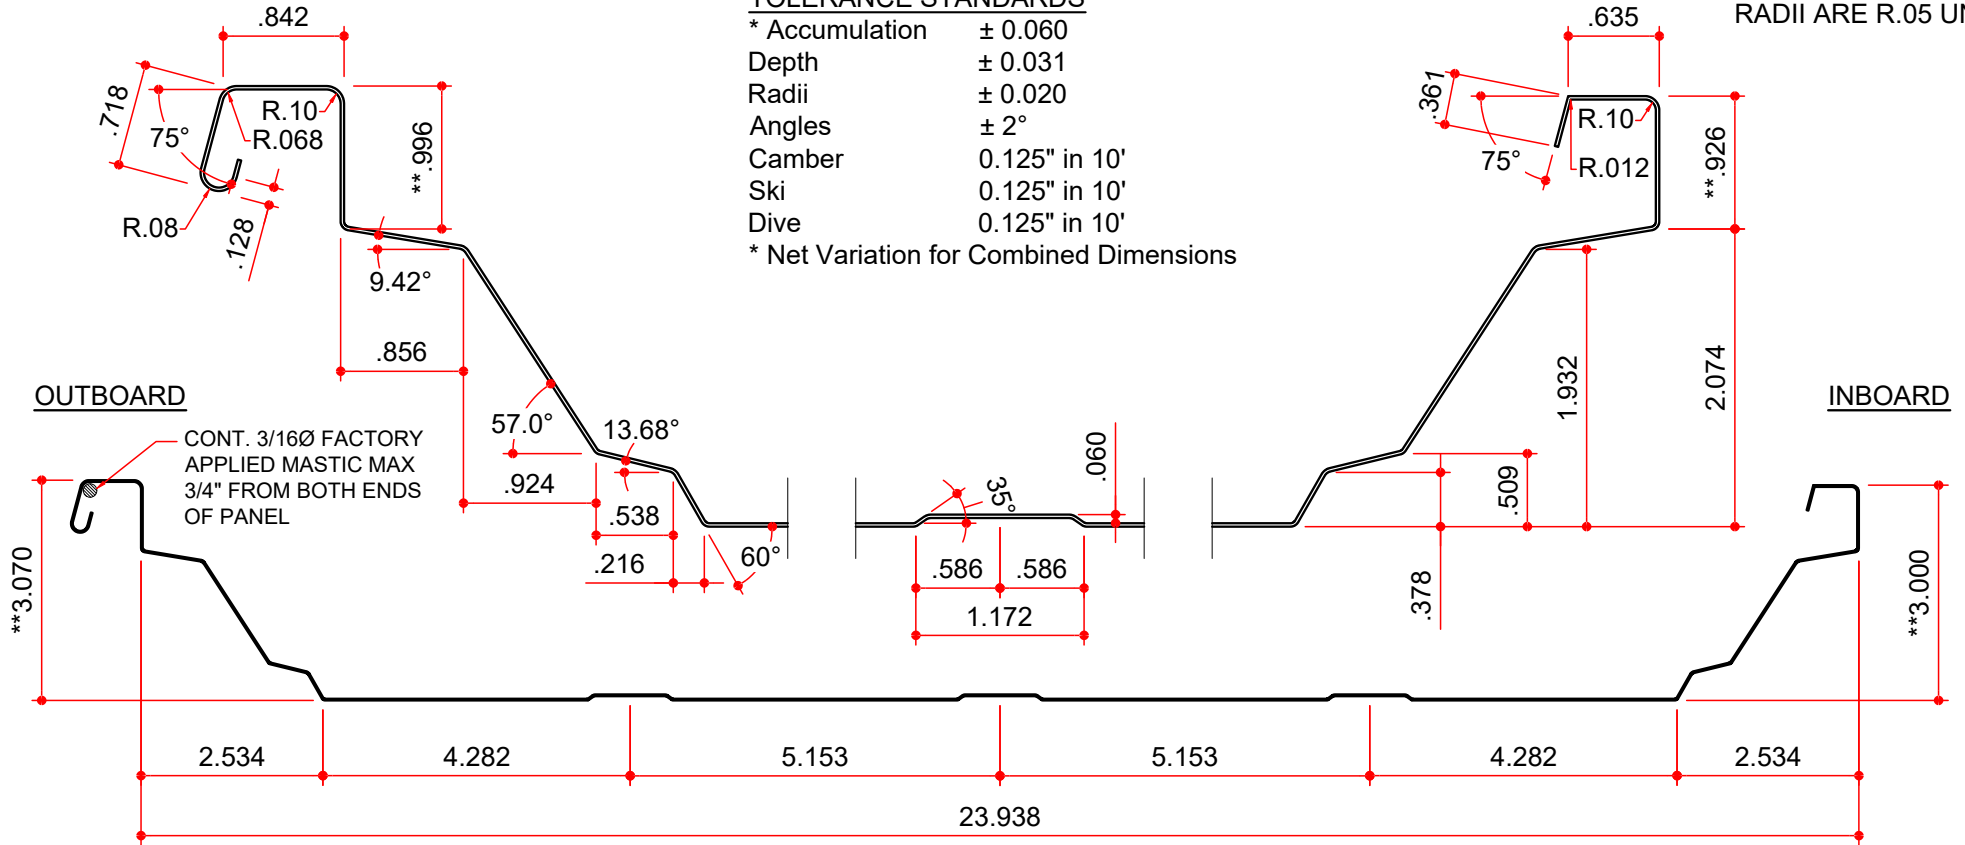

NOTES:

- 1) MATERIAL IS ASTM A-792 AZ55 FOR GALVALUME AZ50 FOR PAINTED
- 2) ** INDICATES DIMENSION IS OUT TO OUT OF MATERIAL

AVAILABLE COLORS

ALL STANDARD SMP & PVDF COLORS & GM