


MASTER PART MARK	VIN	AVAILABLE THICKNESS	YIELD MIN.	BLANK LENGTH	BLANK WIDTH	WEIGHT / FT (LBS)
LS_22-	A	22 GA	50 KSI	VARIABLES	22.00	2.38
LS_24-	A	24 GA	50 KSI	VARIABLES	22.00	1.79

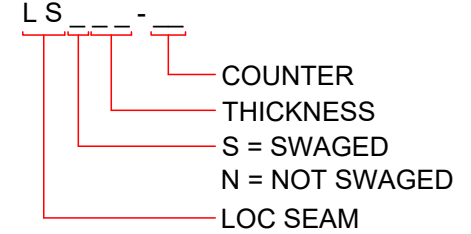


NOTE:
RADII ARE R.093 UNO

TOLERANCE STANDARDS

* Accumulation	± 0.060
Depth	± 0.031
Radii	± 0.030
Angles	± 2°
Camber	0.125" in 10'
Ski	0.125" in 10'
Dive	0.125" in 10'

* Net Variation for Combined Dimensions

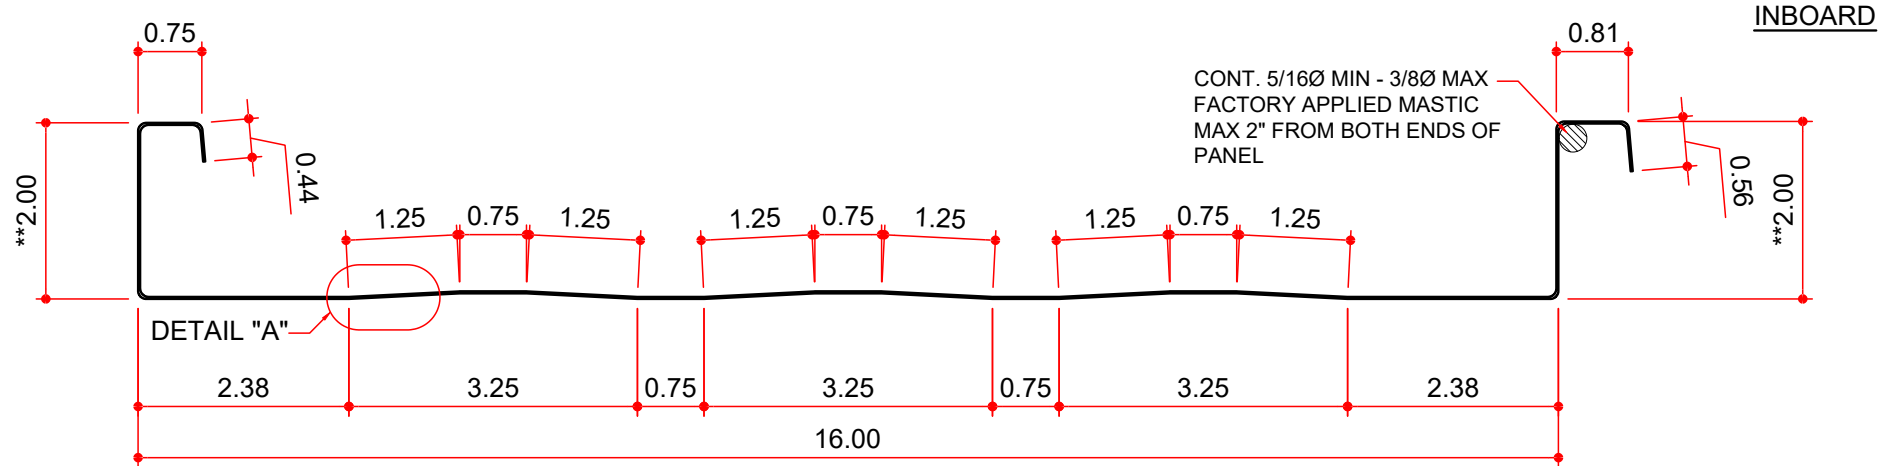

NOTES:

- 1) MATERIAL IS ASTM A-792
AZ55 FOR GALVALUME
AZ50 FOR PAINTED
- 2) ** INDICATES DIMENSION IS OUT TO OUT OF MATERIAL

AVAILABLE COLORS

ALL STANDARD
PVDF COLORS
& GM