


ANSI/SDI-NC-1.0 ATTACHMENT NC2

SDI Pour Stop Selection Table

NON-COMPOSITE

SLAB DEPTH (INCHES)	OVERHANG (INCHES)												
	0	1	2	3	4	5	6	7	8	9	10	11	12
4.00	20	20	20	20	18	18	16	14	12	12	12	10	10
4.25	20	20	20	18	18	16	16	14	12	12	12	10	10
4.50	20	20	20	18	18	16	16	14	12	12	12	10	10
4.75	20	20	18	18	16	16	14	14	12	12	10	10	10
5.00	20	20	18	18	16	16	14	14	12	12	10	10	
5.25	20	18	18	16	16	14	14	12	12	12	10	10	
5.50	20	18	18	16	16	14	14	12	12	12	10	10	
5.75	20	18	16	16	14	14	12	12	12	12	10	10	
6.00	18	18	16	16	14	14	12	12	12	10	10	10	
6.25	18	18	16	14	14	12	12	12	12	10	10	10	
6.50	18	16	16	14	14	12	12	12	12	10	10	10	
6.75	18	16	14	14	14	12	12	12	10	10	10	10	
7.00	18	16	14	14	12	12	12	12	10	10	10	10	
7.25	16	16	14	14	12	12	12	10	10	10	10	10	
7.50	16	14	14	12	12	12	12	10	10	10	10	10	
7.75	16	14	14	12	12	12	10	10	10	10	10	10	
8.00	14	14	12	12	12	12	10	10	10	10	10	10	
8.25	14	14	12	12	12	10	10	10	10	10	10	10	
8.50	14	12	12	12	12	10	10	10	10	10	10	10	
8.75	14	12	12	12	12	10	10	10	10	10	10	10	
9.00	14	12	12	12	10	10	10	10	10	10	10	10	
9.25	12	12	12	12	10	10	10	10	10	10	10	10	
9.50	12	12	12	10	10	10	10	10	10	10	10	10	
9.75	12	12	12	10	10	10	10	10	10	10	10	10	
10.00	12	12	10	10	10	10	10	10	10	10	10	10	
10.25	12	12	10	10	10	10	10	10	10	10	10	10	
10.50	12	12	10	10	10	10	10	10	10	10	10	10	
10.75	12	10	10	10	10	10	10	10	10	10	10	10	
11.00	12	10	10	10	10	10	10	10	10	10	10	10	
11.25	12	10	10	10	10	10	10	10	10	10	10	10	
11.50	10	10	10	10	10	10	10	10	10	10	10	10	
11.75	10	10	10	10	10	10	10	10	10	10	10	10	
12.00	10	10	10	10	10	10	10	10	10	10	10	10	

TYPES	DESIGN THICKNESS
20	0.0358
18	0.0474
16	0.0598
14	0.0747
12	0.1046
10	0.1345

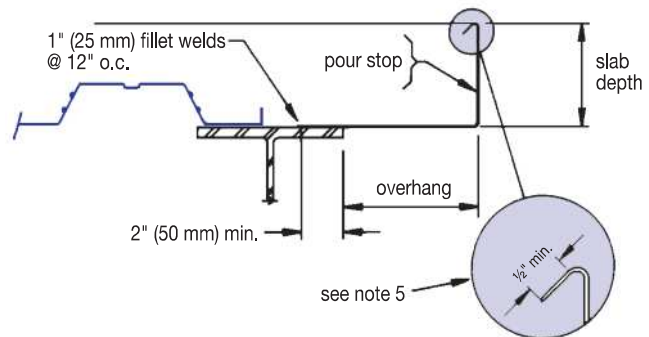

NOTES: This Selection Chart is based on following criteria:

1. Normal weight concrete (150 PCF).
2. Horizontal and vertical deflection is limited to 1/4" maximum for concrete dead load.
3. Design stress is limited to 20 KSI for concrete dead load temporarily increased by one-third for the construction live load of 20 PSF.
4. Pour Stop Selection Chart does not consider the effect of the performance, deflection, or rotation of the pour stop support which may include both the supporting composite deck and/or the frame.
5. Vertical leg return lip is recommended for all types (gages).