

MASTER PART MARK	VIN	AVAILABLE THICKNESS	YIELD MIN.	BLANK LENGTH	BLANK WIDTH	WEIGHT (LBS)
H5200	A	N/A	N/A	124.00	N/A	50.41


USED WITH THE FOLLOWING

SECONDARY SPACING:

- (2) 5'-0" SPACES
- (4) 2'-6" SPACES
- (5) 2'-0" SPACES

NOTE:

INSULATED TRANSLUCENT PANELS UTILIZE DOUBLE LAYER OF FIBERGLASS PANEL

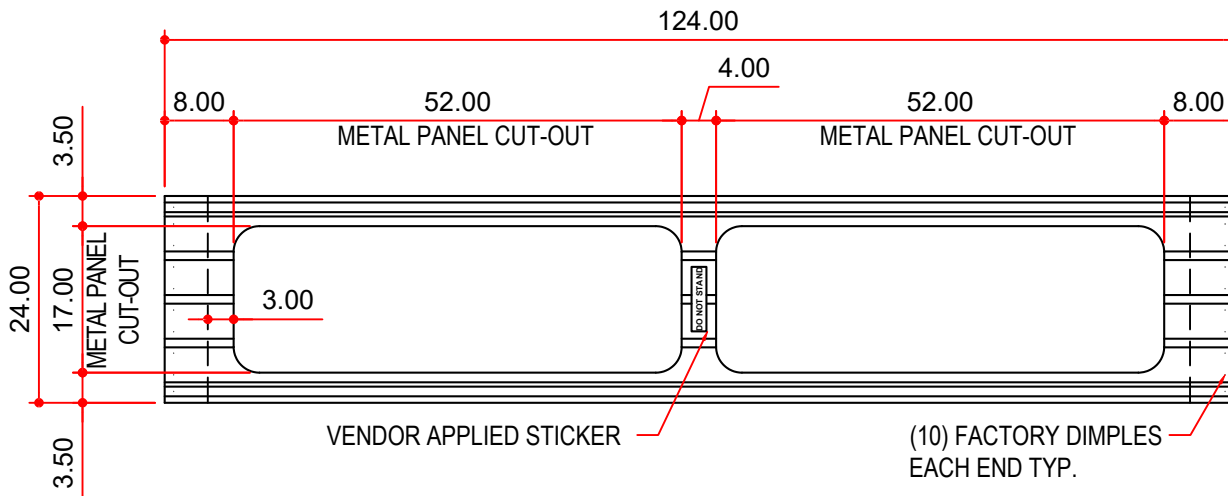

NOTES: BUYOUT

- 1) THIS UNIT **DOES** HAVE A UL90 RATING & FLORIDA APPROVAL.
- 2) A PURCHASE REQUEST MAY BE REQUIRED FOR THIS PART. CHECK WITH YOUR PURCHASING DEPARTMENT.

AVAILABLE COLORS

PW ONLY