



MASTER PART MARK	VIN	AVAILABLE THICKNESS	YIELD MIN.	BLANK LENGTH	BLANK WIDTH	WEIGHT / FT (LBS)
SS322-	A	22 GA	50 KSI	VARIABLES	29.38	3.18
SS324-	A	24 GA	50 KSI	VARIABLES	29.38	2.40

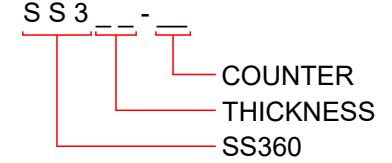

**TOLERANCE STANDARDS**

- \* Accumulation ± 0.060
- Depth ± 0.031
- Radii ± 0.020
- Angles ± 2°
- Camber 0.125" in 10'
- Ski 0.125" in 10'
- Dive 0.125" in 10'
- \* Net Variation for Combined Dimensions

NOTE:  
RADI ARE R.03 UNO

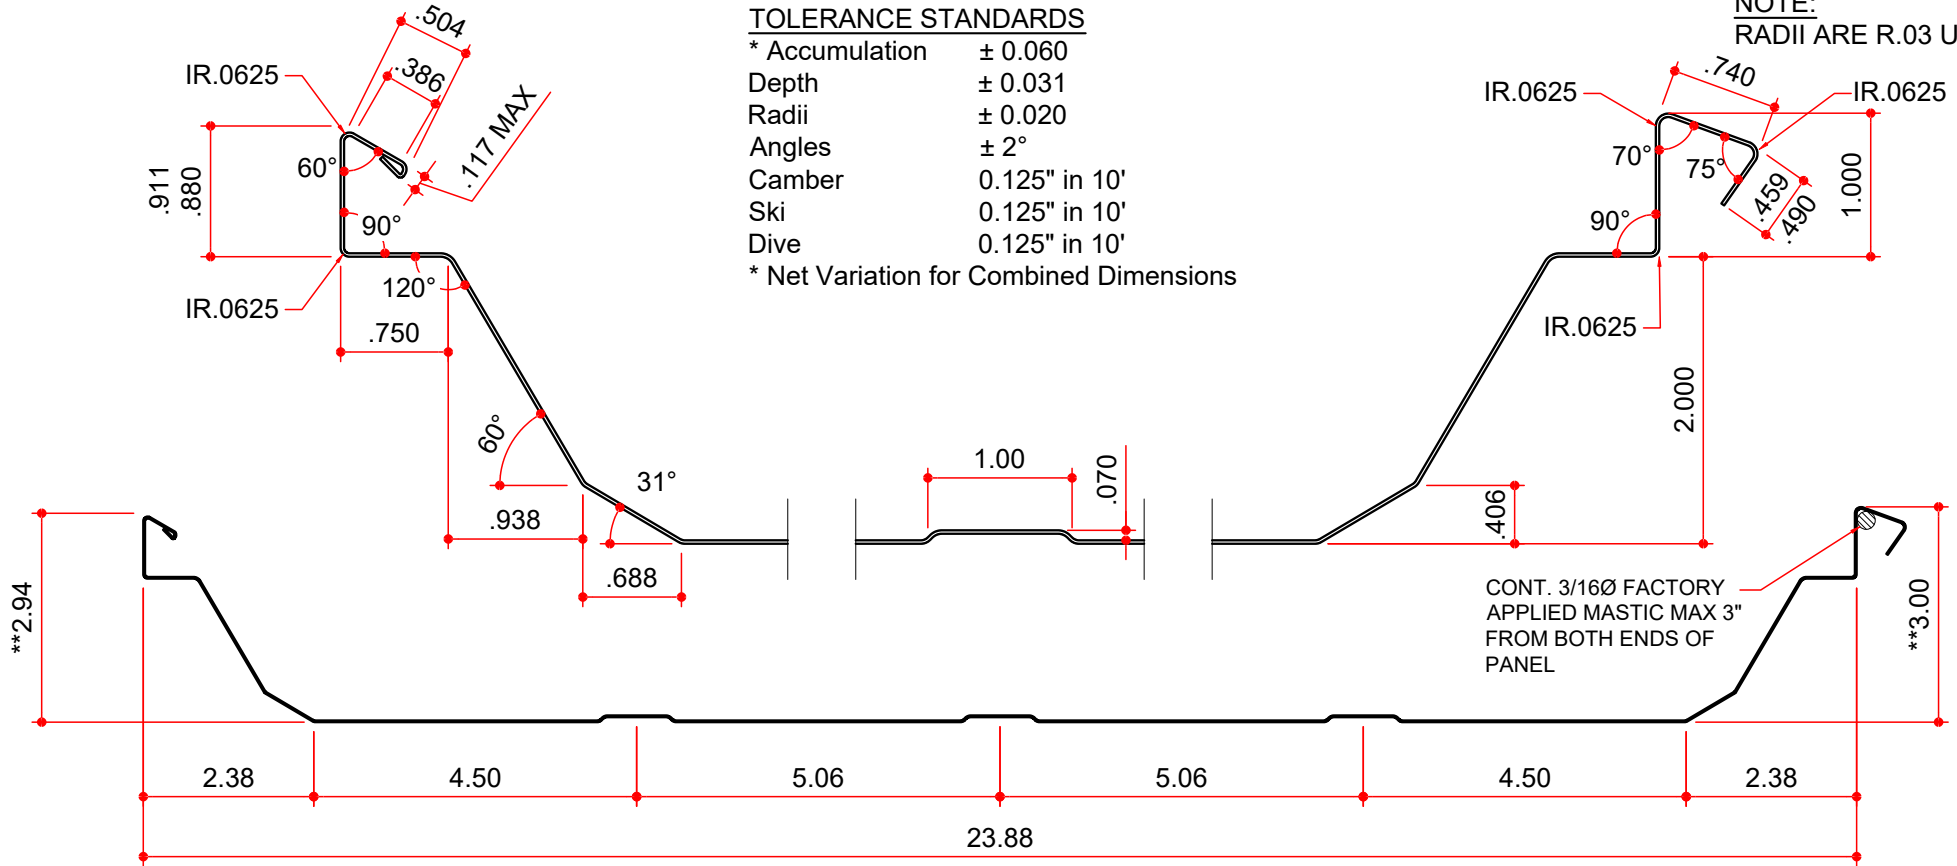

**NOTES:**

- 1) MATERIAL IS ASTM A-792  
AZ55 FOR GALVALUME  
AZ50 FOR PAINTED
- 2) \*\* INDICATES DIMENSION IS OUT TO OUT OF MATERIAL

**AVAILABLE COLORS**

ALL STANDARD  
PVDF COLORS  
& GM