


MASTER PART MARK	VIN	AVAILABLE THICKNESS	YIELD MIN.	BLANK LENGTH	BLANK WIDTH	WEIGHT
12S-_ B	B	0.075, 0.089, 0.099, 0.105, 0.120	55 KSI	VARIABLES	20.44	VARIABLES

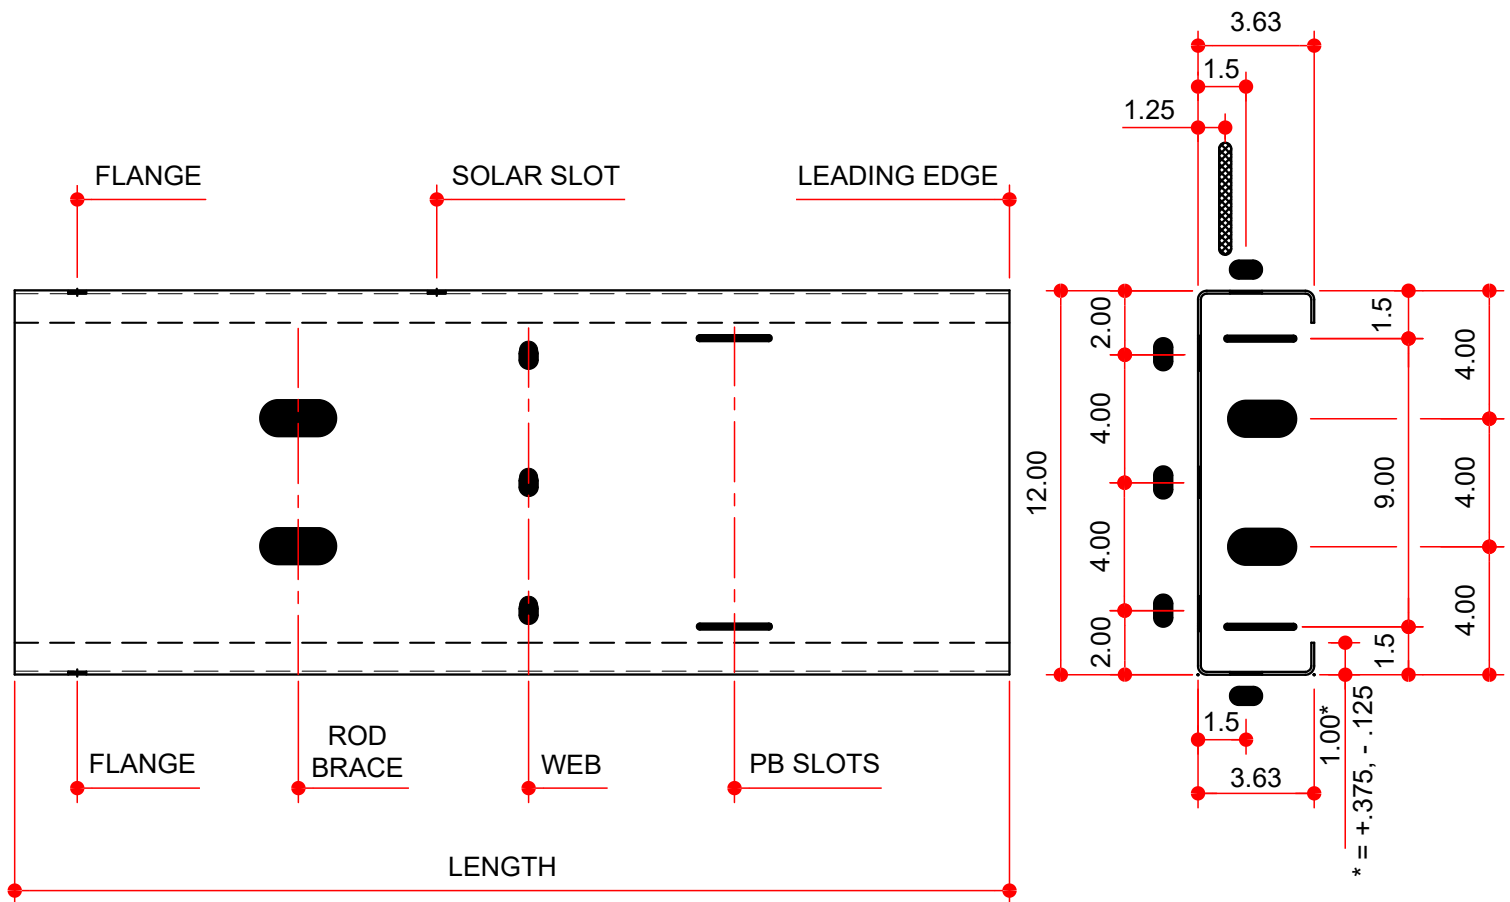

NOTES:

- 1) ALL NBG THICKNESSES SHOWN, INVENTORIED DIVISION THICKNESSES VARY, CONFIRM [HERE](#).
- 2) FOR ADDITION INFORMATION SEE THE "PURLINS / GIRTS" DPM MANUAL.

PUNCHING NOTES

- CODE "W", WEB 9/16" X 1" SLOTS
- CODE "F", FLANGE 9/16" X 1" SLOTS
- CODE "B", BOTH WEB AND FLANGE SLOTS (FOR CF EW)
- CODE "D", ROD BRACE 1 1/8" X 2 3/8" SLOTS
- CODE "J", PURLIN BRACING SLOTS 3/16" x 2 1/4"
- CODE "S", SOLAR SLOT 3/8" X 3 1/2" (available at NBGSC and CBCCA only)

TOLERANCES

- DEPTH ± 3/16"
- FLANGE ± 3/16"
- LIP + 3/8" - 1/8"
- LIP ANGLE ± 5°
- FLANGE TO WEB ANGLE ± 3°
- INSIDE RADII 1/4" (+ 1/8" - 1/16")